


Other Accessories

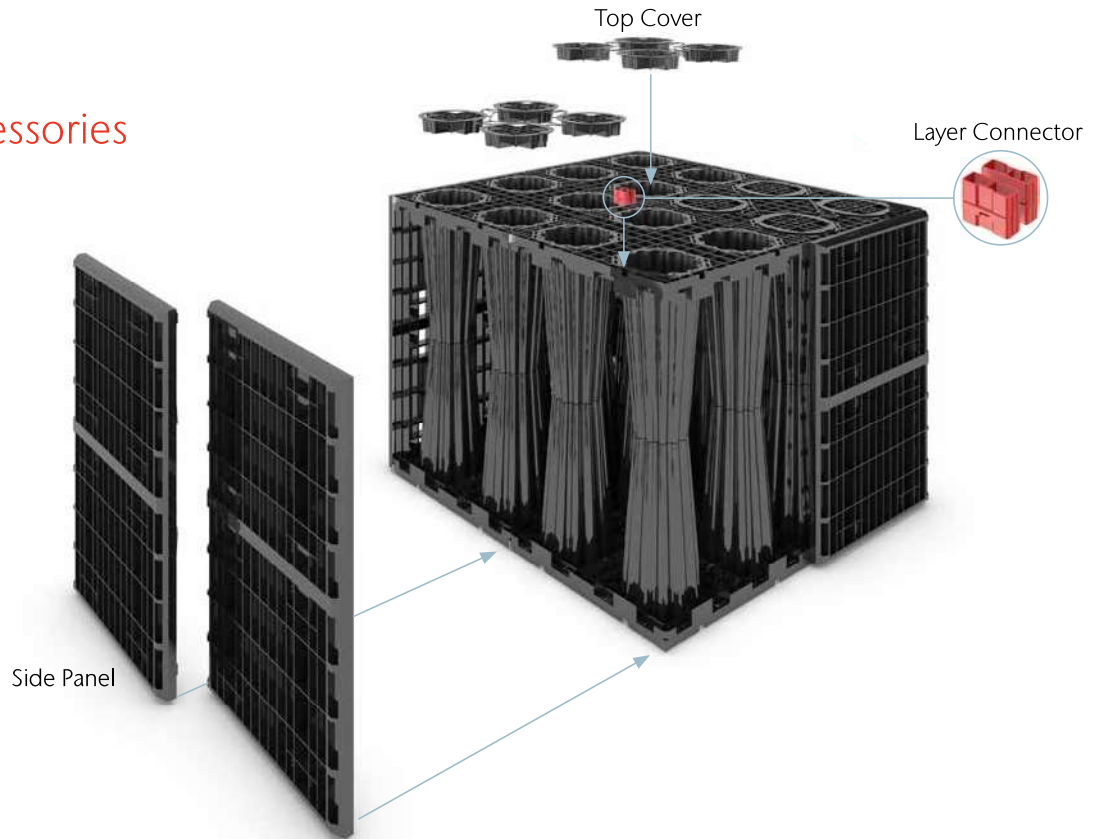

SIDE PANELS

Side panels are placed along the outer perimeter of the geocellular StormBrixx SD system. One side panel fits one module height (two assembled half-modules).

If necessary, pipe connections up to 100–315 mm (12") can be cut out along guides molded into the panels. Pipe connections up to 457 mm (18") can be fabricated to fit within the side panel without affecting its structural integrity.



TOP COVERS

Top covers are used to close off the openings of the columns on the top-most layer of the geocellular system. These covers prevent ground cover material from being pushed into the columns under load.