


## Other Accessories

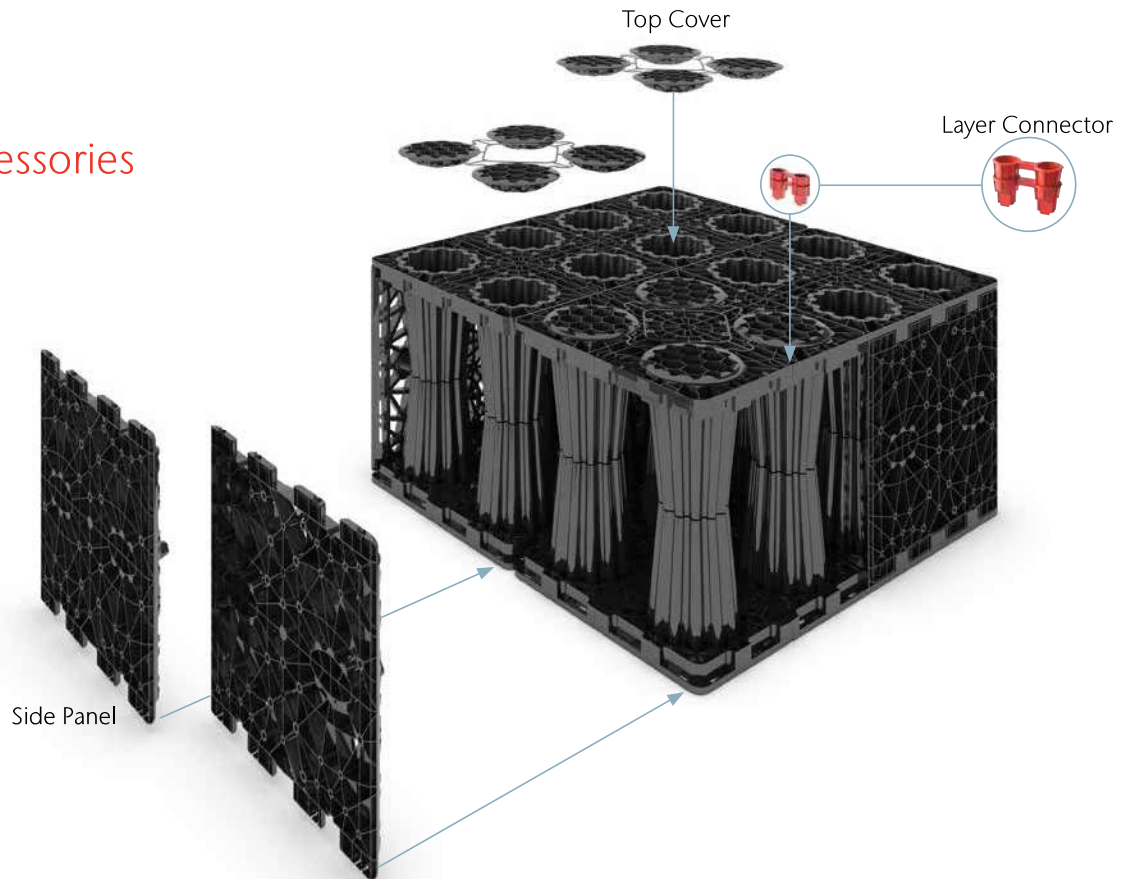

### SIDE PANELS

Side panels are placed along the outer perimeter of the geocellular system. One side panel fits one module height (two assembled half-modules).

If necessary, pipe connections up to 100–315 mm (12") can be cut out along guides molded onto the panels.



### TOP COVERS

Top covers are used to close off the openings of the columns on the top-most layer of the geocellular system. These covers prevent ground cover material from being pushed into the columns under load.